



Installation Instructions for the Four Port Alarm

SK-1483




(Set of 2) Keys

SK-11-AAA



(4) "AAA" Batteries

SK-550

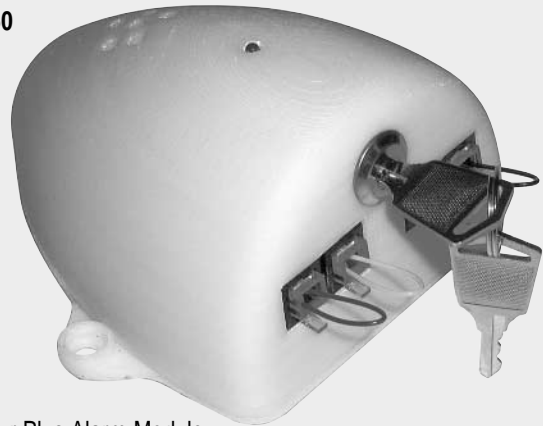

(1) Four Plus Alarm Module

SK-109S



(4) Shunt Plugs

SK-AP1 - Alcohol Prep Pads



SK-4510 - (1) Base Adhesive Pad

SK-1912



(1) Bug Sensor Removal Tool

SKP-200K



(1) Security Allen Wrench

SK-550-02CLE-W



(4) White Coiled Bug Sensor


SK11-027




(2) Sheet Metal Screws

Battery Installation:

1. Remove the battery cover on the bottom of the Four Port Alarm Module with the **SKP-200K Security Allen Wrench**.
2. Pull the battery holder out of the unit and install (4) new "AAA" batteries. Follow the (+) positive and (-) negative polarity markings on the holder.
3. Reinsert the battery holder and replace the security screw that holds the door closed.

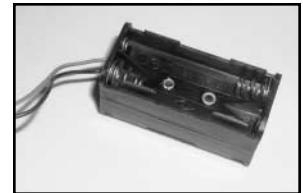

Battery Holder

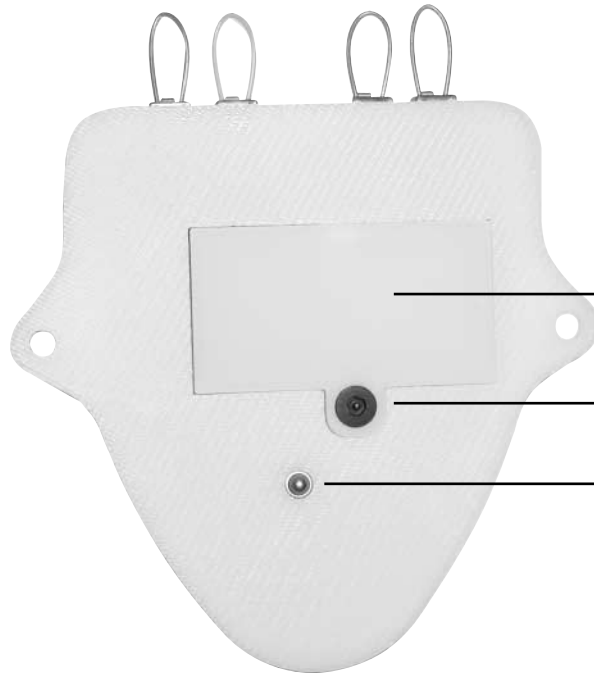

Battery Door

Security Screw

Tamper Switch



Se-Kure Controls,® Inc.

On the Web: www.se-kure.com
E-Mail: info@se-kure.com

3714 Runge Street • Franklin Park, IL 60131 • 1-(800) 322-2435 • (847) 288-1111 • Fax: (847) 288-9999



Installation Instructions for the **Four Port Alarm**

Mounting the Alarm Module

Mount with Screws:

4a. Mount the Alarm Module with the (2) sheet metal screws, see Fig. 1 or...

Mount with Adhesive:

4b. Clean the bottom of the Four Port Alarm Module and the display surface with Alcohol Prep Pads as shown in Fig. 2.

5. While these surfaces are still wet, dry them with a clean cloth or paper towel, see Fig. 3. **If the towel shows dirt, repeat the cleaning step.**

6. Remove the backing sheet from the base adhesive as shown in Fig. 4.

7. Apply the adhesive to the bottom of the Four Port Alarm Module over the battery door as indicated in Fig. 5.

8. Remove the 2nd backing sheet from the adhesive as shown in Fig. 6.

9. Locate the display area you permanently want the Alarm, and firmly press the Four Port Alarm Module down to bond it to the surface.

Installing Sensors:

10. Locate a small flat area on the display product to be protected; clean this area with Alcohol Prep Pads.

11. While the alcohol is still wet, dry this area with a clean paper towel or cloth. **If the towel shows dirt, repeat the cleaning step.**

12. Remove the backing sheet from the bottom of the "Bug Sensor" and press it FIRMLY onto a clean, dry, flat portion of the display product.

13. Remove (and save) a "Shunt Plug" from the Four Port Alarm Module. Plug the sensor you just installed onto a display product into that port on the Four Port Alarm Module. Repeat for all (4) sensors.

14. Turn the key "clockwise" to the "ON" position and remove.

IMPORTANT

- Each of the (4) ports on the alarm module **MUST HAVE** either a "Shunt Plug" or a properly attached sensor plugged in it. If a sensor is removed, replace the port with a "shunt plug".
- The Alarm Module features a TAMPER SWITCH on the bottom, and must be flush mounted to the display surface. If the unit is lifted while the alarm is active, the horn will sound.
- The Red LED light on the top of the Four Port Alarm will Flash approx. every 10 seconds to indicate good batteries. When the batteries are low, and need to be changed, the horn will "chirp".

Fig. 1



Clean with
Alcohol
Prep Pads


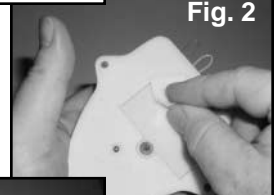


Fig. 2

Fig. 3

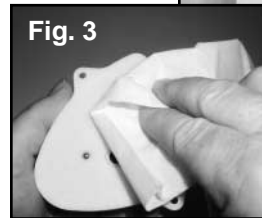

Dry with
Clean
Paper
Towel or
Cloth

Fig. 4

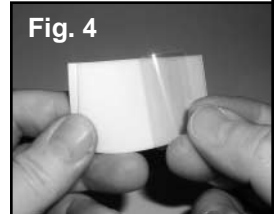


Fig. 5



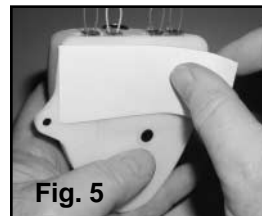


Fig. 6

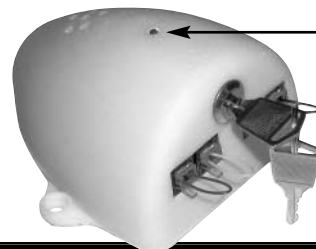

Red LED
Battery
Indicator
Light

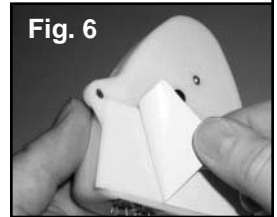

Se-Kure Controls,® Inc.

On the Web: www.se-kure.com
E-Mail: info@se-kure.com

3714 Runge Street • Franklin Park, IL 60131 • 1-(800) 322-2435 • (847) 288-1111 • Fax: (847) 288-9999